

88 5013 89 Bar Stool

IMPORTANT NOTE

Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or other damage occurring to the parts.


We have taken great care in the design of this product and request that you carefully and strictly follow our assembly instructions to ensure a completed product as it was designed.





Spring Washer

11 pcs. (+1 extra)

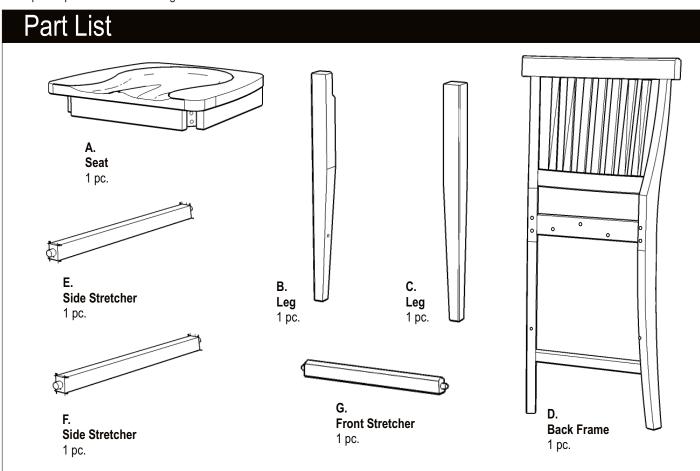



M6x70

Head Cap Bolt (long)

4 pcs. (+1 extra)

Tools required for assembly : Phillips screwdriver

Small Wrench

1 pc.

M6x40

Head Cap Bolt (short)

3 pcs. (+1 extra)



Assembly Instructions 2/2

IMPORTANT

- * Please keep Hex Wrench in a safe place as you may need to tighten up the Head Cap Bolts in the future.
- * Do not tighten up all the bolts until each part is properly assembled.
- * Use a soft cloth between these parts and the floor.


STEP 1


Attach Legs (B) and (C) to Seat (A) with Flat Washers, Spring Washers and Head Cap Bolts. (See Figure 1)


Tighten all Head Cap Bolts only half way.

Attach Front Stretcher (G) to unit with Wood Screws. (See Figure 2)

Attach Side Stretcher (E) to Leg (B) and Side Stretcher (F) to Leg (C) with Wood Screws. (See Figure 2)



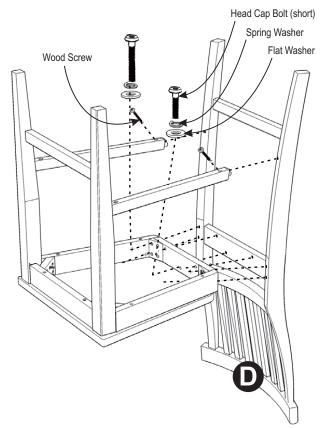

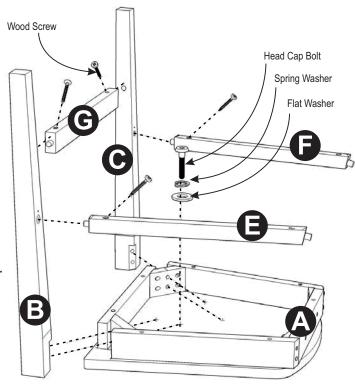

STEP 2

Attach Back Frame (D) to unit with Flat Washers, Spring Washers, Head Cap Bolts (short), Head Cap Bolts (long) and Wood Screws. (See Figure 3 and Figure 4)

Tighten all Head Cap Bolts.




Figure 3

Figure 4