


304 Stainless Steel, Full Extension, ESR-4513

Weight capacity: 40 - 52 kg (87 - 115 lbs.)/pair

- 1/2" side space required
- Lever disconnect
- Hold-in detent
- Not rated for MRI

Note

M4 or #8 pan head screws are recommended.

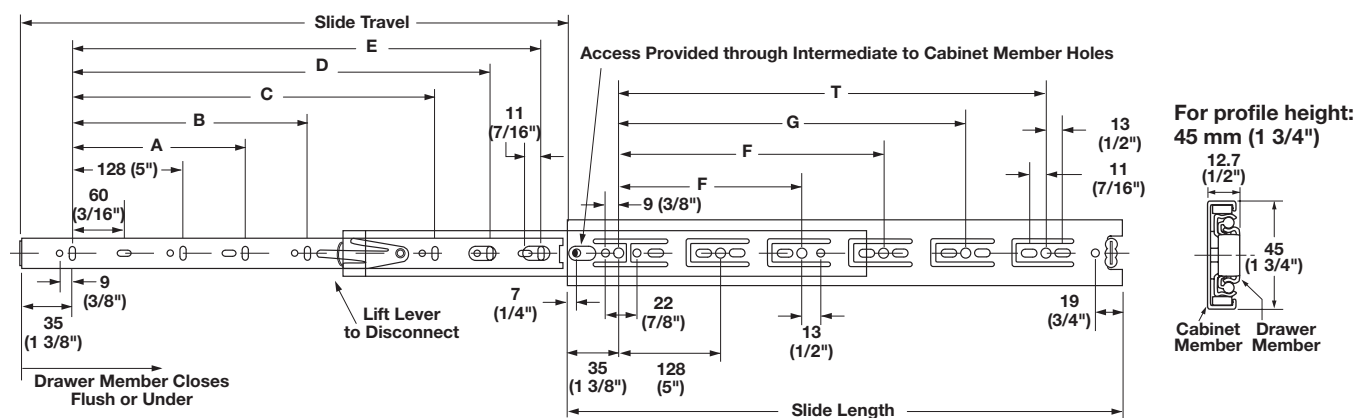

8

Side Mounted

Profile height: 45 mm (1 3/4")

Material: Stainless Steel, passivated

Length	Travel	Weight - per/pair	A	B	C	D	E	F	G	T	Item No.
250 (9 7/8")	243 (10")	52 kg (115 lbs.)	-	-	-	-	192 (7 9/16")	-	-	-	420.43.025
300 (11 13/16")	305 (12")	50 kg (111 lbs.)	-	-	-	-	242 (9 1/2")	224 (13/16")	-	-	420.43.030
350 (13 3/4")	355 (14")	49 kg (108 lbs.)	-	-	-	-	292 (11 1/2")	224 (13/16")	-	-	420.43.035
400 (15 3/4")	406 (16")	47 kg (104 lbs.)	-	-	-	-	342 (13 1/2")	224 (13/16")	320 (2 5/8")	-	420.43.040
450 (17 3/4")	457 (18")	46 kg (100 lbs.)	-	-	320 (2 5/8")	-	392 (15 1/2")	224 (13/16")	352 (2 5/8")	-	420.43.045
500 (19 11/16")	508 (20")	44 kg (97 lbs.)	-	-	320 (2 5/8")	-	442 (17 1/2")	224 (13/16")	416 (16 3/8")	-	420.43.050
550 (21 11/16")	559 (22")	43 kg (95 lbs.)	-	-	320 (2 5/8")	416 (16 3/8")	492 (19 1/2")	224 (13/16")	352 (2 5/8")	448 (17 5/8")	420.43.055
600 (23 11/16")	610 (24")	42 kg (92 lbs.)	224 (13/16")	-	416 (16 3/8")	-	542 (21 1/2")	224 (13/16")	352 (2 5/8")	480 (18 7/8")	420.43.060
650 (25 1/2")	660 (26")	41 kg (90 lbs.)	224 (13/16")	-	416 (16 3/8")	544 (21 3/8")	592 (23 5/16")	224 (13/16")	352 (2 5/8")	544 (21 3/8")	420.43.065
700 (27 1/2")	711 (28")	40 kg (88 lbs.)	224 (13/16")	288 (11 5/16")	416 (16 3/8")	544 (21 3/8")	642 (25 9/32")	224 (13/16")	352 (2 5/8")	544 (21 3/8")	420.43.070

Dimensions in mm
Inches are approximate

FC 8.82

Dimensional data not binding. We reserve the right to alter specifications without notice.