

NEW!

12V DC


FineLine 2.0

4.4W/ft.
(14.4 W/m)

330 Lumens
per ft.
(1082 per meter)




Pencil thin but still packing a big punch, FineLine is the unobtrusive way to provide stunning lighting to casework, displays, store fixtures and more. The low-profile design features a milk diffuser for even illumination, Luniform technology, and with optional manual or remote-control dimmers, creating the perfect atmosphere is effortless.

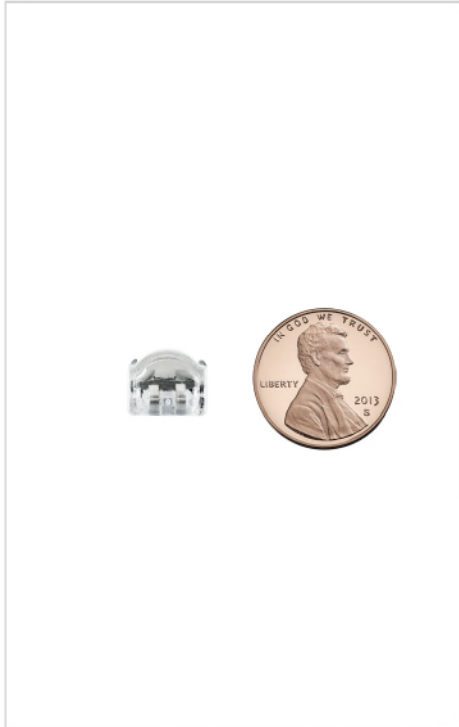

Extremely thin, low-profile design
(5/16" (8 mm))



Linkable (back-to-back or link cord)
up to 12' (3.66 m) continuous run

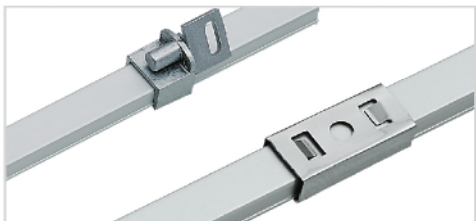

Straight & adjustable
mounting U-Clips included

Features:

Extremely thin, low-profile design (5/16" (8 mm))

120° beam spread

Milk diffuser

Luniform Technology-no visible diodes on surface of fixture

Available in 3 lengths (8", 12", 22", 34")

Dimmable

Seamless light output when linked

Commercial grade 5-year warranty

Typical Applications:

Shelving

Displays or store fixtures

Interior and under cabinets



Available Finishes:




Aluminum (AL)


Dimensions:



8" (203 mm)
12" (305 mm)
22" (559 mm)
34" (864 mm)

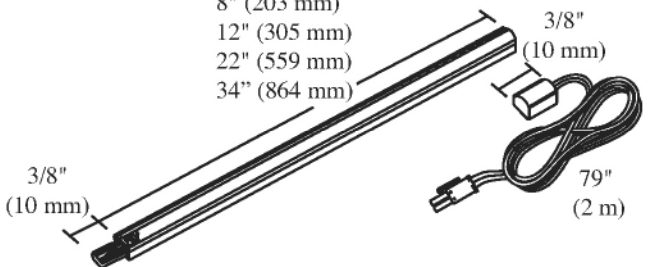

Typical Setup:

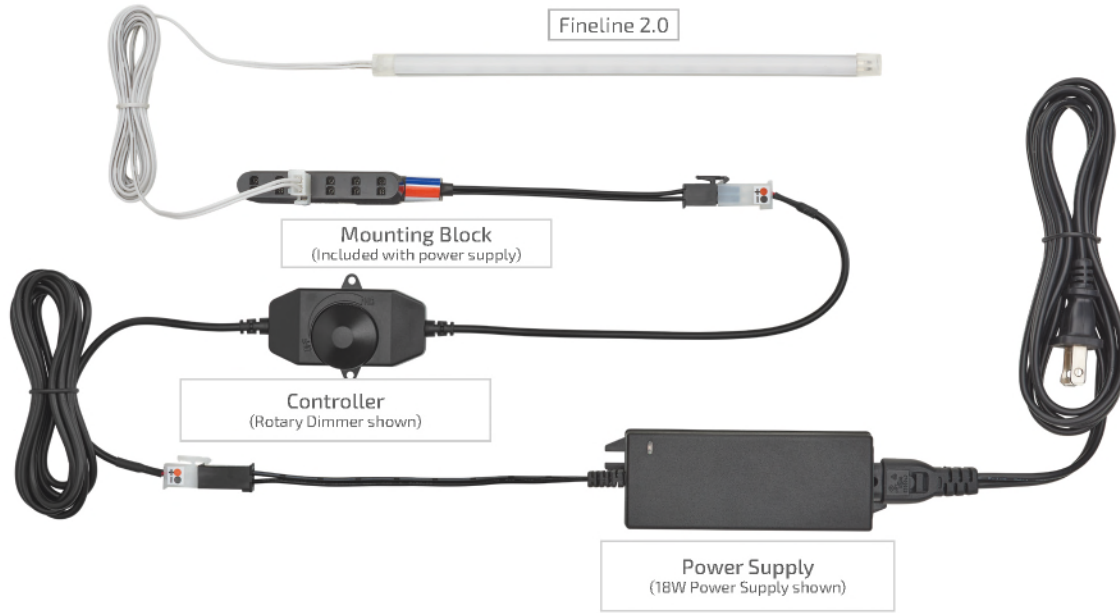


- Required
- Optional

Accessories:



Power Supplies
see power supply section



Controllers
see controllers section



FineLine Touch Dimmer
L-LED-STKDIM-TD4-1



FineLine Link Cord
L-LED-STKLNK-5-1
L-LED-STKLNK-15-1
L-LED-STKLNK-25-1
L-LED-STKLNK-60-1
L-LED-STKLNK-120-1
L-LED-STKLNK-180-1



Adjustable U-Clip Packs
L-STKAUCLP-NI-1

Specifications:

Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per 60W Power Supply	Max Continuous Run	Mounting	Warranty	Beam Angle										
4.4W/ft. (14.4 W/m)	330 per ft. (1082 per m)	75	12VDC	50,000 Hours	13' (4 m)	12' (3.66 m)	Surface/ Recess	5 Year											
Photometric Data					Color Temperature														
		<table border="1"> <thead> <tr> <th>Height</th> <th>Light Output</th> <th>Beam Area</th> </tr> </thead> <tbody> <tr> <td>1ft (.3 m)</td> <td>279Fc (3003.1lx)</td> <td>3.4ft L x 3.6ft W (1 m L x 1.1 m W)</td> </tr> <tr> <td>3ft (.9 m)</td> <td>31.0Fc (333.6lx)</td> <td>10.3ft L x 10.8ft W (3.1 m L x 3.3 m W)</td> </tr> <tr> <td>6ft (1.8 m)</td> <td>7.75Fc (83.4lx)</td> <td>20.5ft L x 21.6ft W (6.2 m L x 6.6 m W)</td> </tr> </tbody> </table>	Height	Light Output	Beam Area	1ft (.3 m)	279Fc (3003.1lx)	3.4ft L x 3.6ft W (1 m L x 1.1 m W)	3ft (.9 m)	31.0Fc (333.6lx)	10.3ft L x 10.8ft W (3.1 m L x 3.3 m W)	6ft (1.8 m)	7.75Fc (83.4lx)	20.5ft L x 21.6ft W (6.2 m L x 6.6 m W)					
Height	Light Output	Beam Area																	
1ft (.3 m)	279Fc (3003.1lx)	3.4ft L x 3.6ft W (1 m L x 1.1 m W)																	
3ft (.9 m)	31.0Fc (333.6lx)	10.3ft L x 10.8ft W (3.1 m L x 3.3 m W)																	
6ft (1.8 m)	7.75Fc (83.4lx)	20.5ft L x 21.6ft W (6.2 m L x 6.6 m W)																	
L-STKH034-CNI-1 Tested																			

See page 70 for part numbers and descriptions