




WAV Smart Receiver / Power Supply

Smart control for *single color or tunable white lighting*



T-TWAV-60W-PSR

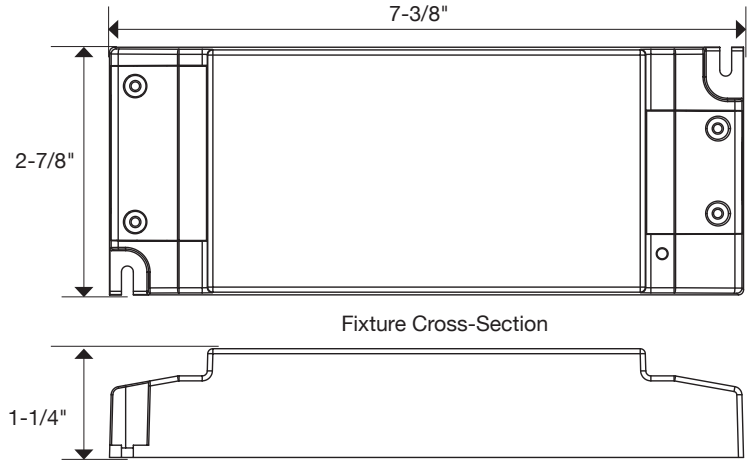

WAV SMART RECEIVER / POWER SUPPLY

PART NUMBER	DESCRIPTION / OUTPUT	DIMENSIONS	AC CORD LENGTH
T-TWAV-60W-PSR	WAV 60 watt all-in-one smart LED receiver and power supply. Allows you to use a wireless controller, a smart phone app, or voice control with a smart home hub to control lights. Use with TandemLED smart controller (T-T-1Z-WC-RF-Color) for tunable white light control. Also compatible with the UNO 1-Zone LED controller (T-Q-1Z-WC-RF-Color), DUO 2-Zone LED controller (T-Q-2Z-WC-RF-Color), and the Quattro 4-Zone LED controller (T-Q-4Z-WC-RF-Color) for single color control.	7-3/8" x 2-7/8" x 1-1/4" 186.6 mm x 73 mm x 32 mm	3-1/4" 1000 mm

FEATURES

- Smart Receiver and Power Supply all-in-one for less components to install
- Turns lighting into smart home compatible*
- Compatible with single white lighting and tunable white lighting
- Dims on 12 volt side
- 3-year limited warranty
- Designed for indoor application
- Use with TandemLED Wireless Controller for wireless tunable white lighting control
- Use with Uno, Duo, or Quattro Wireless Controller for wireless lighting control

INSTALLATION LOCATIONS

- Above Cabinet / Open Soffits
- Interior Wall Cabinet
- Base Cabinets
- Open Covers
- Any Available & Accessible Outlets

DO NOT INSTALL IN AN ATTIC

TECHNICAL INFORMATION

Series	WAV Smart Control™ Series
Input Voltage	100 - 240 volt AC
Output Voltage	12 volt DC
Output Wattage	60 watts
Dimmable	By using wireless controller or smartphone app
IP Rating	20
Rating	cULus Recognized
Rated Life	30,000 hours
Mounting	Screw holes located on opposite corners of receiver
Wiring	20/2 stranded or 20/2 solid
Operating Temperature	-4°F to 113°F (-20°C to 45°C)
Environment	Dry location
Construction Material	PC plastic
Warranty	3 years

*Compatible with Zigbee-enabled smart home hub products available from several manufacturers