



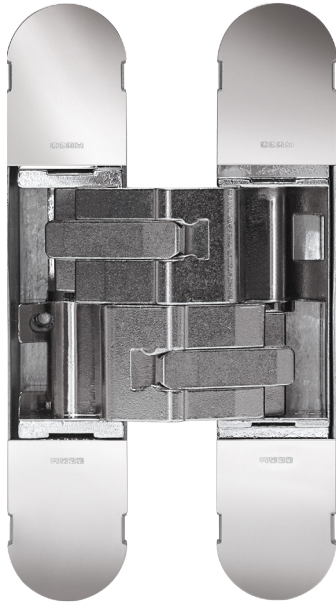

1131

160 x 32 mm



MAIN FEATURES:

- Available in 10 different finishes
- Suitable for doors of 38mm min. thickness up to 1000mm wide
- Easy 3D adjustable
- Load capacity 265 lbs. (120 kg.)
- Fluid 180° opening
- Easy installation with symmetrical mortising for door and frame
- Manufactured in Zinc to resist oxidation
- Tested for minimum 200,000 opening /closing cycles.
- UL certified
- Manufactured in Italy



EN 1634-1
EI - 120



Fireproof

COLOR	ITEM NUMBER	DESCRIPTION
	C1131NK	3D Invisible Hinge 160 x 32 Nickel Plated
	C1131SNI	3D Invisible Hinge 160 x32 Satin Nickel Plated
	C1131BLK	3D Invisible Hinge 160 x 32 Matte Black Painted

*Other finishes available upon request

MODEL	TECHNOLOGY	MATERIAL	DIMENSION L - W - D mm.	MINIMUM DOOR THICKNESS mm.	RANGE OF REVERSIBILITY mm.	LOAD CAPACITY Lbs / Kg.		FIREPROOF min.
						2 hinges	3 hinges	
1131	Concealed Hinge	Zinc	160 x 32 x 29	38	38-46	177lbs 80Kg	265lbs 120Kg	EI120'

