

Oletto™ / KPF-2610

Single Lever Pull-Out Kitchen Faucet

Chrome / Stainless Steel Finishes

Kräus®

SPECIFICATION SHEET

Material

Body: Metal
 Handle: Zinc
 Sprayer: Plastic
 Waterway: Braided Nylon

Spout

Swivel: 120
 Design: Short Body
 Pull Out

Sprayhead

Flow Rate: 1.75 gpm (6.6L/min) @ 60 psi
 Aerator: Neoperl/1.75GPM
 Name: Cache Perlator Honeycomb
 Function: Spray/Stream/Pause
 Nozzles: Easy Clean Rubber Nozzles
 Docking: Secure

Hose

Type: Neoperl

Cartridge

Brand: Kerox
 Size: 35mm
 Style: Lever

Mounting

Holes: 1 - 3 Holes
 Type: Quick Dock

Waterlines


Type : Neoperl, 700mm
 Flexible
 Connections: 3/8"
 Materials: Braided Nylon
 Included
 Factory Installed

Dimensions

Faucet Dimensions: 10 1/2" x 8 1/8" x 2"
 Handle Clearance: 11 3/8"

Accessories Included

Escutcheon Plate, Weight, Hex Wrench

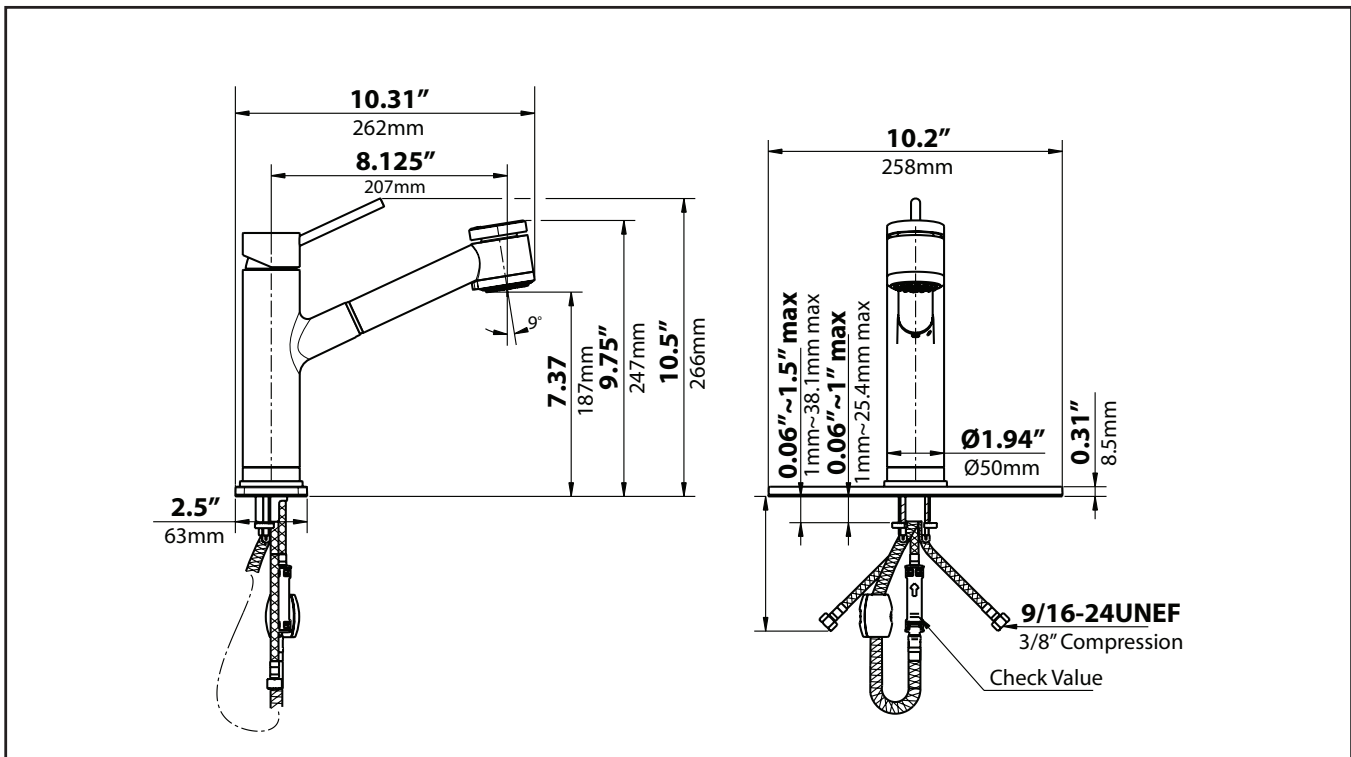

Codes/Standards: Meets ASME A112.18.1/CSA B125.1, NSF/ANSI Standard 61 certified by IAPMO, NSF/ANSI Standard 372 certified by IAPMO, CAL GREEN, CEC, DOE, ADA

REV. January 24, 2018