


## ASSEMBLY INSTRUCTIONS KITCHEN ISLAND BAR

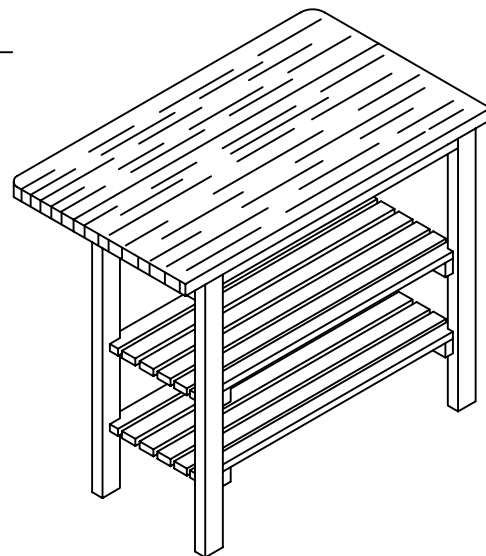


- PARTS:**
- (1) Table top
  - (4) Table legs
  - (2) Slatted lower shelves

#### TOOLS REQUIRED

7/16 WRENCH OR 7/16 SOCKET WRENCH  
9/16 WRENCH OR 9/16 SOCKET WRENCH  
HAMMER  
PHILLIPS SCREWDRIVER


#### HARDWARE FOR ASSEMBLY

8 EA.  1/4"x2" LAG SCREW

8 EA.  1/4" FLAT WASHER

NOTE: ITEMS ABOVE IN WITH SHELF

4 EA.  3/8"x2" LAG SCREW

4 EA.  3/8" FLAT WASHER

4 EA.  GLIDE

NOTE: ITEMS ABOVE IN WITH TOP

**CAUTION:** Make certain assistance is available when setting table upright to avoid injury to yourself or the table.

**SUGGESTION:** Applying bar soap to bolt or screw threads will make them much easier to insert and lessen the chance of breakage.

- INSTRUCTIONS:**
- (1) Remove all contents of box, making sure assembly area is flat and clean.
  - (2) Place top face down on a rug, carton, or other protected surface. Remove wood blocks attached to drop leaf and top.
  - (3) Attach each of four legs to the metal brackets at each corner. Start one 3/8"x2" lag bolt with washer in each hole. Do not tighten completely at this time. Note: Position legs so shelf mounting holes in lower portion of leg is facing in along the table's length.
  - (4) Position upper shelf between legs and start one 1/4"x2" lag bolt with washer at each hole. Do not tighten completely at this time. Repeat for lower shelf.
  - (5) Now go back and tighten leg bolts and shelf bolts securely. Do not over tighten.
  - (6) Center floor glide in leg bottom and hammer in.
  - (7) Turn table right side up. Your new Kitchen Island Bar is now ready for use. ENJOY!

Be sure to follow the maintenance and care guidelines on the enclosed sheet for your new John Boos product.

**NOTE:** When moving table, never pick up one end and drag the other. This will cause the legs to become loose. To move, lift table from both ends and carry, making sure assistance is available.