


Frameless (european styled) Cabinet and Door Specification

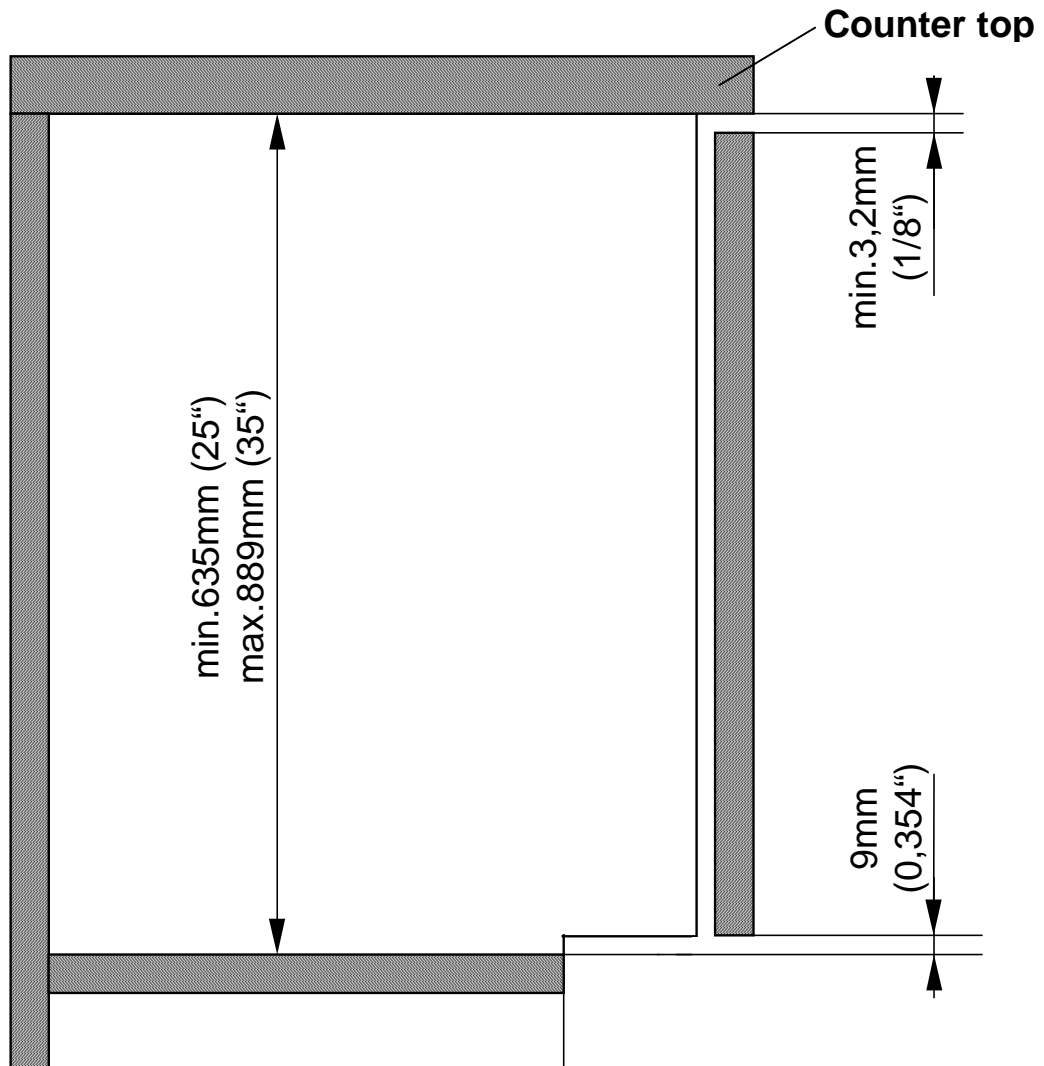


Remarks:

Please note that the cabinet bottom has to be positioned according to the dimensions indicated in the drawing.

Door thickness 19,1mm (3/4")

All tolerances $\pm 0,5\text{mm}$ ($\pm 0,02''$)

Frameless (european styled) Cabinet Bottom

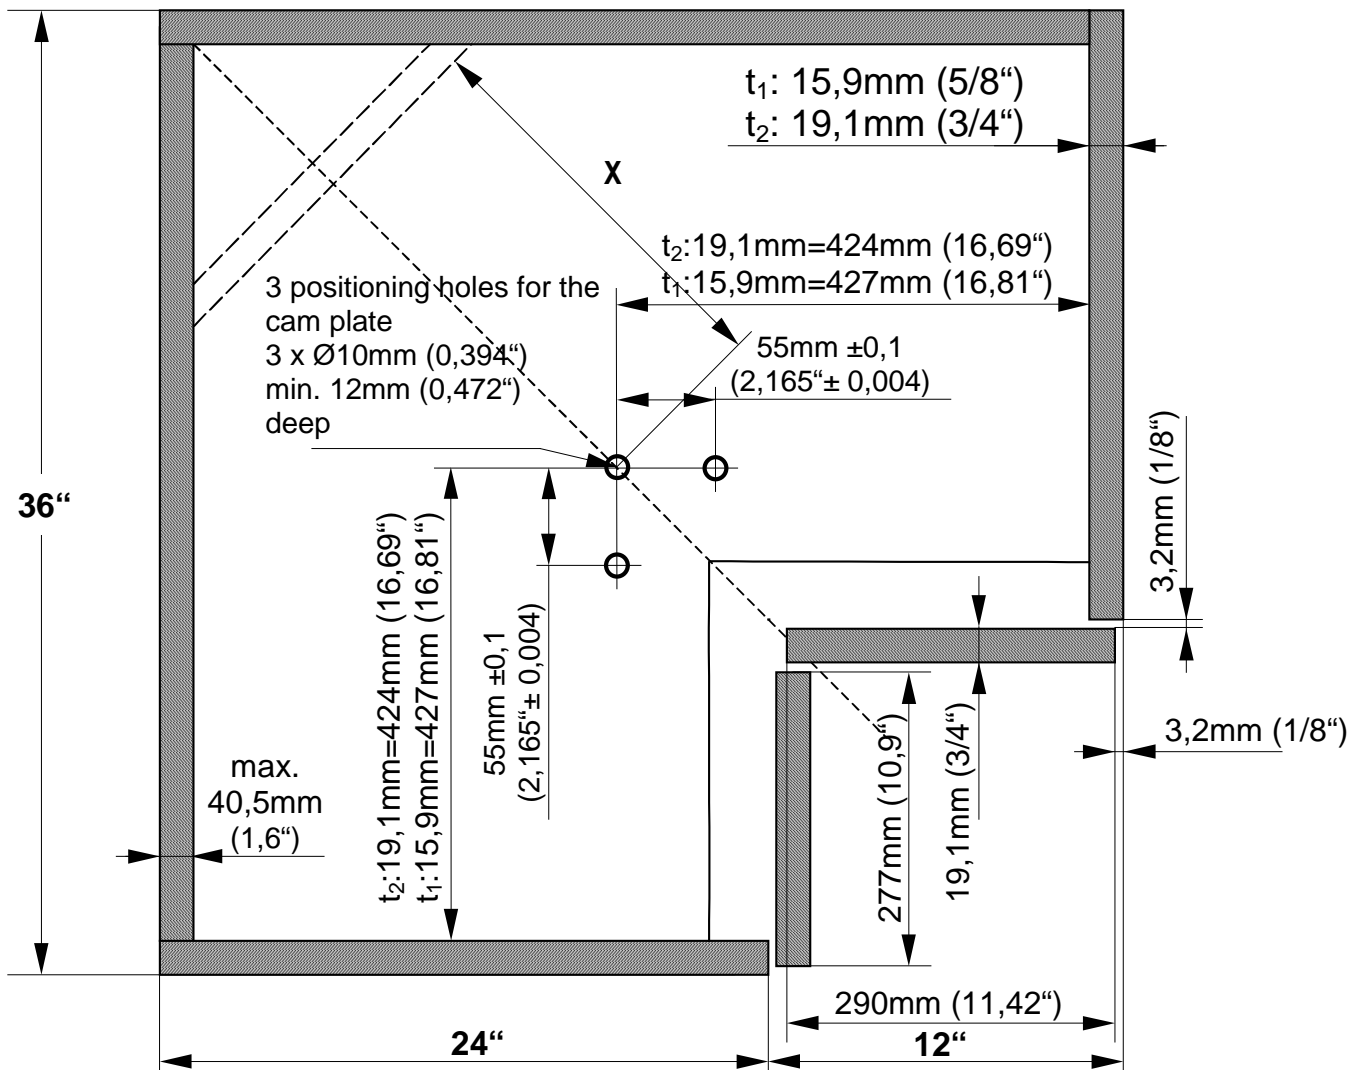

Remarks:

If you use different door widths, please assure that left door is wider door.

Fitting can be used with 5/8" and 3/4" side wall thickness. Door thickness 19,1mm (3/4").


Dimension X has to be min. 427mm for side wall thickness

15,9mm (5/8") and min. 424mm for side wall thickness

19,1mm (3/4")

All tolerances $\pm 0,5\text{mm}$ ($\pm 0,02''$)

Frameless (european styled) Side Wall

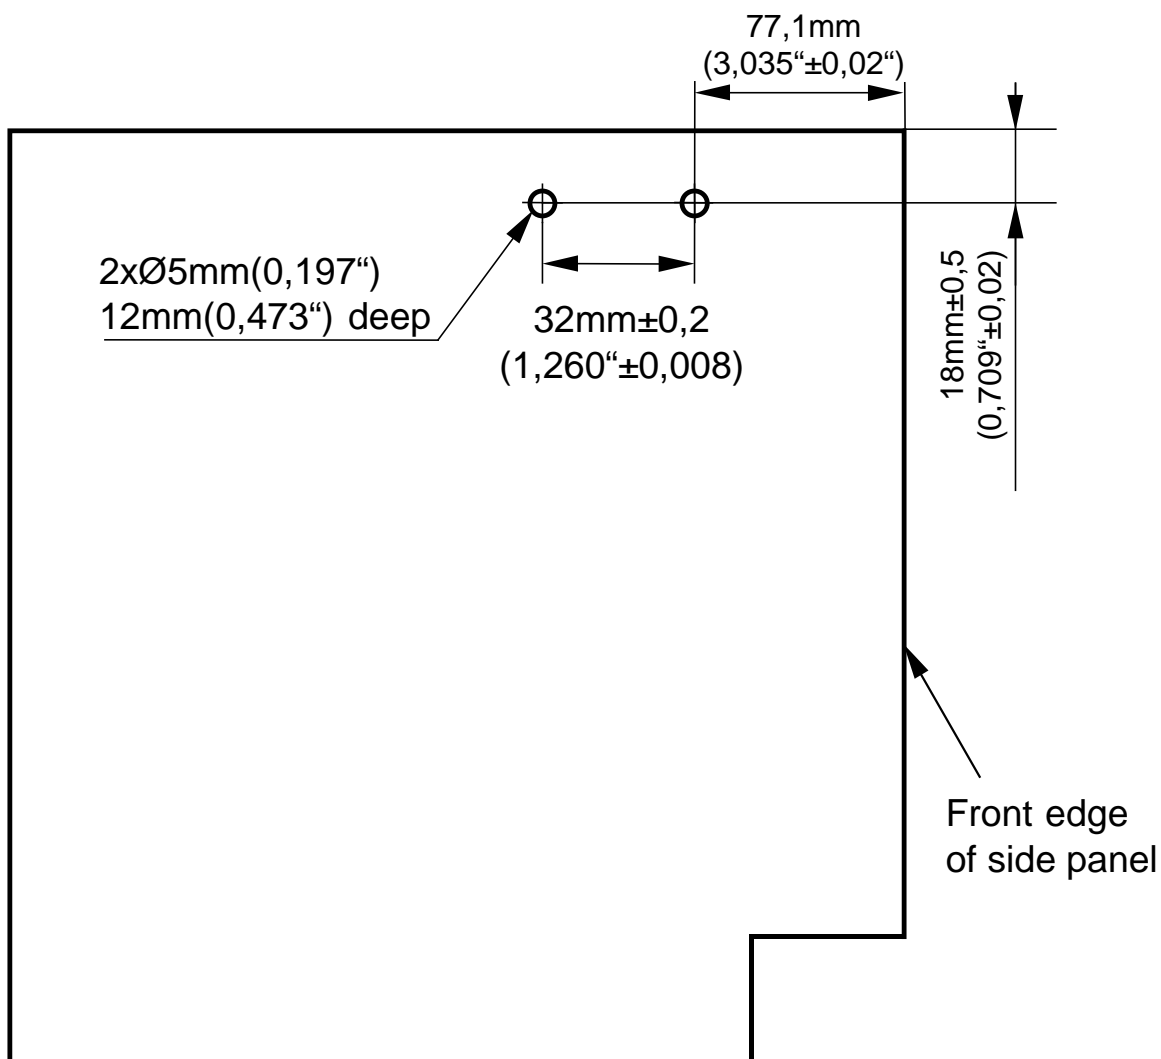


Remarks:

Holes are for mounting the upper mounting bracket. Please use the 3mm plastic spacer included with the bracket only for the side wall thickness of 15,9mm ($5/8''$). The spacers have to be put between the bracket and the side wall in order to get the correct location of the pivot point.

All tolerances $\pm 0,5\text{mm}$ ($\pm 0,02''$)

Frameless (european styled) Door Specification

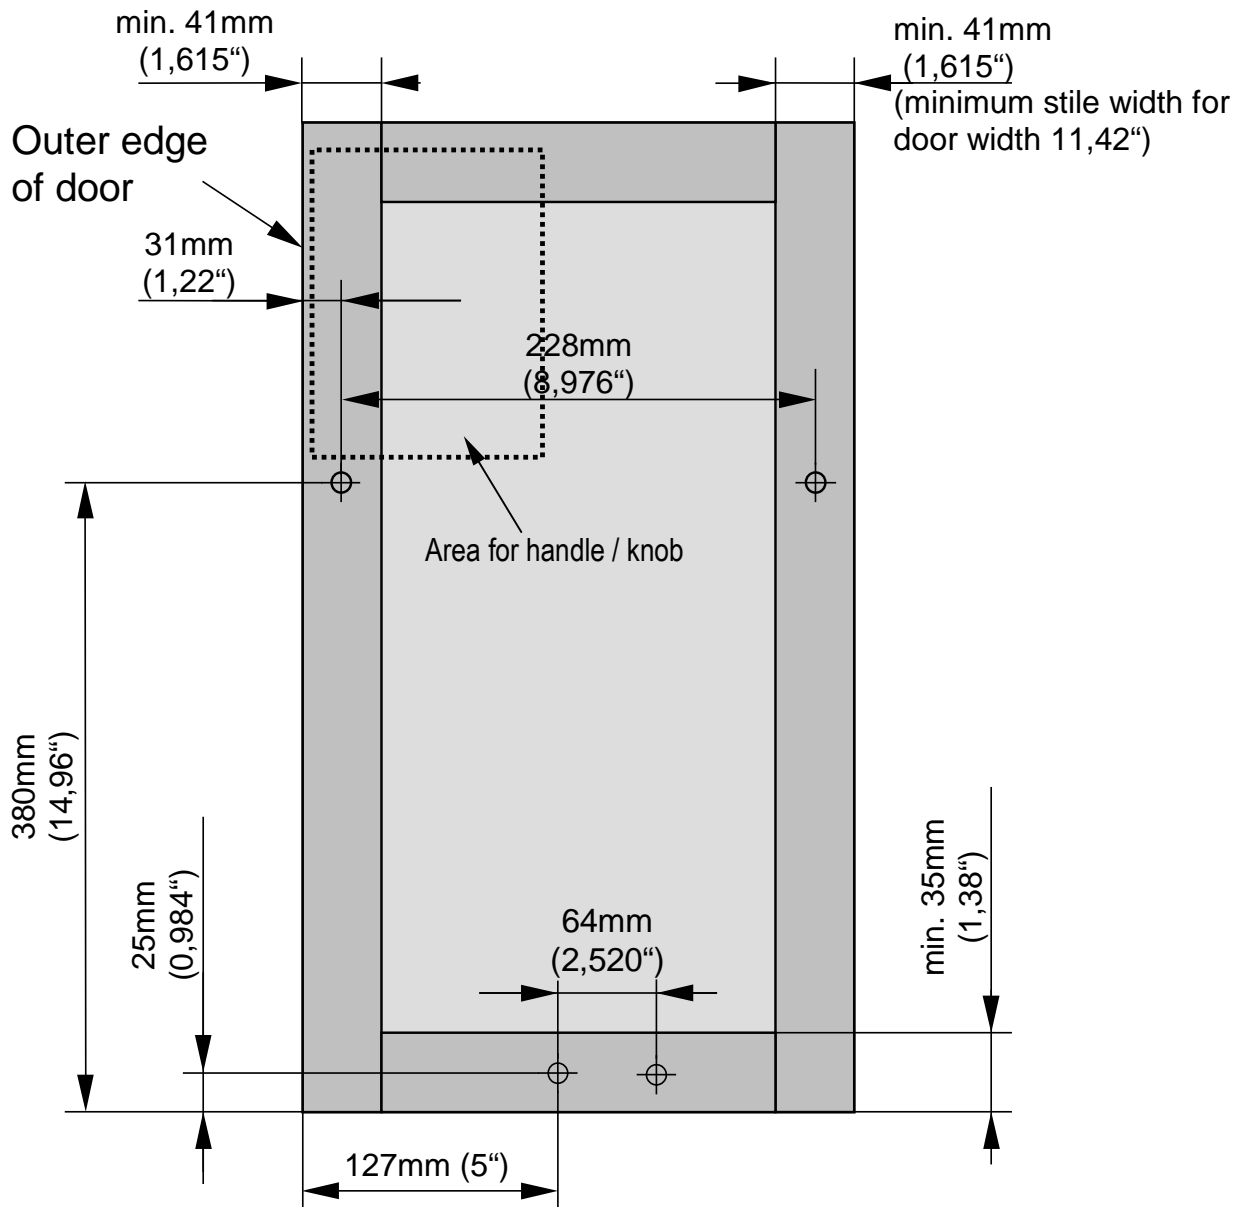

Remarks: Please use handle or knob in the upper and outer area of both doors. If you use different door widths, please assure that left door is wider door.

Longer side of the upper door brackets point to the outer edge of the door. Lower door brackets are unhandled. Door thickness 19,1mm (3/4")

All tolerances $\pm 0,5\text{mm}$ ($\pm 0,02\text{"}$)