

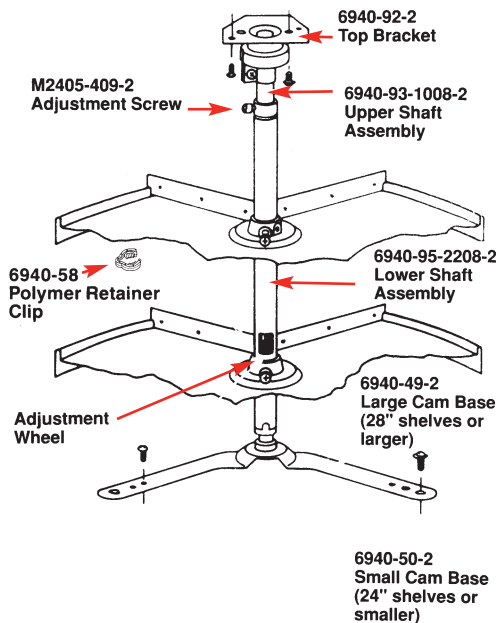




## CLEANING AND LUBRICATION

Clean as needed with mild soap and lukewarm water. Any common household lubricant is acceptable.



**REV-A-LOCK**




**|||kitchensource.com**

1.800.667.8721




## PIE-CUT CABINET STORAGE ORGANIZER MODEL 6940

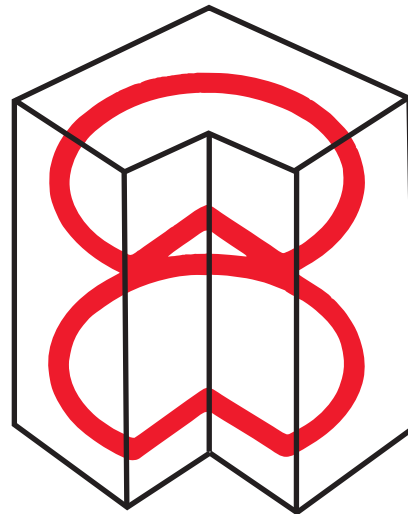

Form 4-94

Please keep this brochure for future reference

## INSUFFICIENT SIDE CLEARANCE ADJUSTMENT




### Step 1 Top Adjustment

Remove and save lockdown screws.

Loosen star washer screws to re-center pivot.

Tighten, check and repeat if necessary.




### Step 2 Bottom Adjustment

Rotate door to expose screws on bottom bracket

Remove and save lock down screws.


Loosen star washer screws to re-center pivot cam base (both sides).

Tighten, check and repeat if necessary.




## UNEVEN OR INCOMPLETE DOOR CLOSING ADJUSTMENT

(To center the doors correctly in the frame for proper clearance)



**Step 1**  
Loosen clamp screw in white plastic housing (approx. 1 turn) to prepare for positioning adjustment.





**Step 2**  
Rotate door counter-clockwise until white plastic housing has been latched into position with spring. A resistance to turning will be felt when the housing reaches the latched position and may be accompanied at a click or latching sound.

**Step 3**  
Rotate door slowly clockwise to exact front centered position but not pass it. Release door to check alignment. You may need to rotate door a little past center to allow for slight spring-back. If you rotate too far, go back to step 2 and repeat.

**Step 4**  
SLOWLY rotate door counter-clockwise far enough so that clamp screw faces you again. Tighten clamp screw securely, being careful not to rotate white plastic housing out of position.

## TOP/BOTTOM CLEARANCE ADJUSTMENT

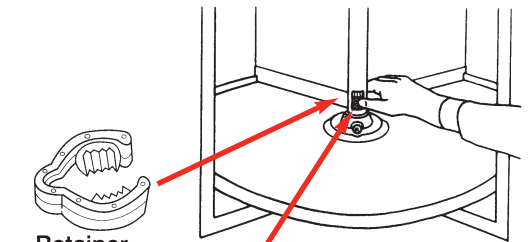

**Step 1**  
Remove polymer retainer clip.

**Step 2**  
Turn adjustment wheel (located inside cut out portion of shaft) clockwise to raise shelf/door unit. One full turn raises door 1/32". After adjustment, be sure to replace retainer clip.

**Note: If shelves are heavily loaded, lift lower shelf slightly to aid adjustment. Total adjustment 1/2".**

**Note: When adjustments are completed, be sure to securely tighten all adjustment screws in housing, shaft bushing and tray adjustment screws. If bracket lock down screws were removed, please re-install after all adjustments are made.**

**Tools required for adjustments:**  
Phillips Screwdriver