



S-cube MEDICINE CABINET



FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
 - Pre-drilled mounting holes spacing: y = 11.625" center-to-center and x = 11.0" center-to-center
- Formed and welded stainless steel housing (WB/SS)
 - 22 gauge stainless steel construction
- Framed mirror door
 - 2MM thick float glass mirror door front
 - 24 gauge stainless steel door back
 - Polished stainless steel frame (SS8)
- Reversible for left-hand or right-hand door swing
- Magnetic catch in cabinet body flange aligns to stainless steel striker plate on the door (1 typical)
- 16" piano hinge welded to the door and mechanically fastened to the cabinet body (HG01) (1 typical)
- 24 gauge stainless steel shelves (3 typical)
 - Fixed shelf - removable (FX2)
- Includes installation hardware
- Pallet Quantity = 42 units

Housing: SS4- Brushed Stainless Steel
 Mirror: Flat Mirror
 Frame: SS8-Polished Stainless Steel

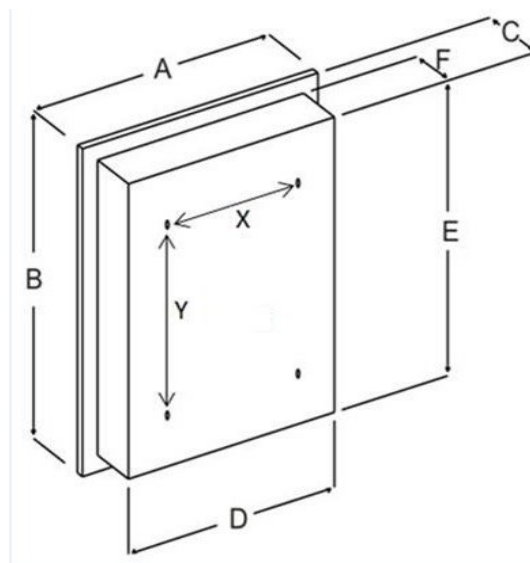

		Dimensions In Inches					
Model #	Description	A	B	C	D	E	F
230P26SS	MEDCAB 1DR 16X26 SS8 WB/SS	16½	26½	5	15½	25½	4½

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

* All models and material specifications are subject to change or withdrawal without notice.

S230P26SS_A19

Rangaire Manufacturing Company, LP * 501 S. Wilhite Street, Cleburne, TX 76031