


- Load capacity: 1,000 lbs. per pair when mounted on 16" centers
- A 3/4" x 1 1/2" notching system for fast and easy alignment after installing a level wall cleat
- Two different sized arm lengths, which allow for one brace to be used for two different sized countertops
- Heavy-duty folded steel design for strength
- Two conduit holes, which are designed for running power and communication cables independently
- Countersunk screw holes allow screws to be mounted flush, recommended screw size is a #8 with a countersunk head
- Available in epoxy-coated or stainless steel

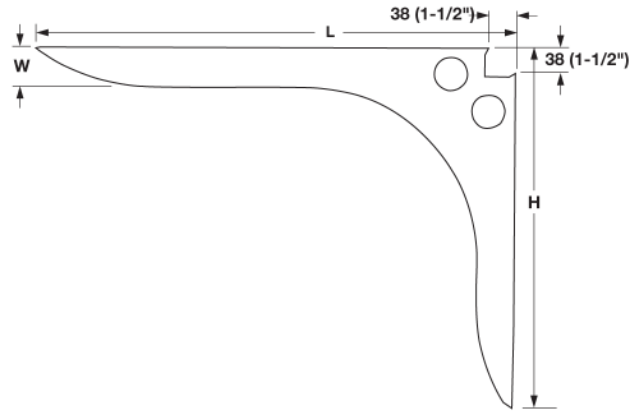

Recommended Countertop Sizes:

| | |
|-----------|---------------------|
| 21" x 28" | brace: 30"-32" tops |
| 28" x 21" | brace: 22"-24" tops |
| 15" x 18" | brace: 20"-24" tops |
| 18" x 15" | brace: 16"-20" tops |
| 8" x 12" | brace: 10"-16" tops |

Material: Steel

| L x W x H | Finish/Color | Item No. |
|-------------------------------------|-----------------|------------|
| 711 (28") x 45 (1 3/4") x 533 (21") | stainless steel | 287.77.003 |
| 711 (28") x 45 (1 3/4") x 533 (21") | black | 287.74.307 |
| 711 (28") x 45 (1 3/4") x 533 (21") | white | 287.74.707 |
| 457 (18") x 38 (1 1/2") x 381 (15") | stainless steel | 287.77.002 |
| 457 (18") x 38 (1 1/2") x 381 (15") | black | 287.74.304 |
| 457 (18") x 38 (1 1/2") x 381 (15") | white | 287.74.704 |
| 305 (12") x 38 (1 1/2") x 203 (8") | stainless steel | 287.77.001 |
| 305 (12") x 38 (1 1/2") x 203 (8") | black | 287.74.301 |
| 305 (12") x 38 (1 1/2") x 203 (8") | white | 287.74.701 |