


- Especially suited for use in larger door cabinets such as home theater applications
- For use with doors up to 60" high, 24" wide & weighing up to 35 lbs.
- Accommodates doors up to 1 1/4" thick
- Jigs or fixtures are not required to locate slide top and bottom, integral location tabs locate slides in cabinet
- Adjustment screws allow maximum adjustability, cable tensioning adjustment is located at the slide front
- Easily accessible from front of cabinet
- Steel cable is black nylon coated to reduce friction and enhance appearance
- Cable runs parallel with slide to ensure smooth operation, eliminating excess pressure on slide
- Positive out-stop on slide keeps door in alignment in closed position
- Soft rubber roller on slide front protects door front from scratches and marring
- Minimal installation and adjustment time for lower production costs
- 32 mm compatible
- Patent pending

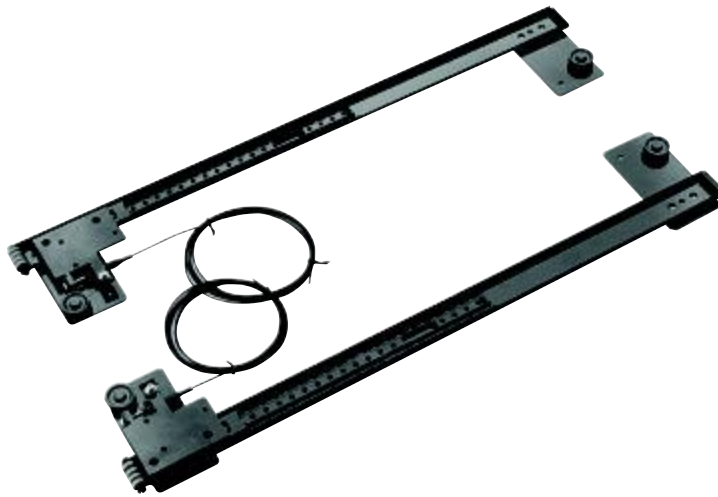

### XL Slide

- With cables attached
- Travel distance = slide length - 114 mm (4 1/2")

Material: Steel, Zinc-electroplated and Plastic  
Cable: Steel, nylon coated; Color: black

Length	Length	Item No.
408 (16 1/16")	294 (11 1/2")	408.24.315
440 (17 5/16")	326 (12 7/8")	408.24.324
504 (19 7/8")	390 (15 3/8")	408.24.333
536 (21 1/8")	422 (16 5/8")	408.24.342
600 (23 5/8")	486 (19 1/8")	408.24.351
664 (26 1/8")	550 (21 3/4")	408.24.360

### Note

Accessory pack required to complete assembly.

