

Air King®

Ventilation Products

SPECIFICATIONS

AV SERIES

RANGE HOODS

180 CFM/7.0 Sones @ 0.10" WG. Horizontal,
180 CFM/7.5 Sones @ 0.10"WG. Vertical, 120 Volts, 2.1 amps, 60hz

• Dimensions

Overall bottom projection - 18³/₈"
 Overall top projection - 12"
 Height - 6". Available widths: 21", 24", 30", 36" & 42"

• Hood Body

23 gauge cold rolled steel, auto welded, coated with a baked enamel finish.

• Motor

2 speed, single coil, thermally protected, permanently lubricated.
 Rated 120 volts, 60 Hz., 2.1 amps.

• Lighting

Single 60 watt cook light capacity (bulb not included).

• Ducting Options


Horizontal ducting: 3¹/₄"x10" (duct adapter and damper included).
 Vertical ducting: 3¹/₄"x10" (duct adapter and damper included).
 Vertical ducting: 7" round (duct adapter and damper not included).
 Ductless: removable front vent (charcoal filter not included).

• Fan Blade


One piece polymeric, electronically balanced blade. 6⁵/₈" diameter with 5 paddles.

• Electrical connection

Hood top - 7/8" electrical knockout.
 Hood back - 7/8" electrical knockout.

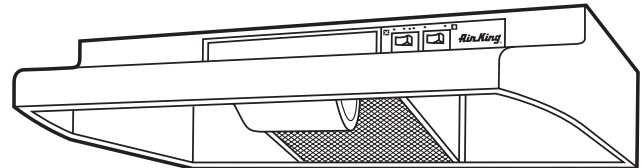

AV SERIES

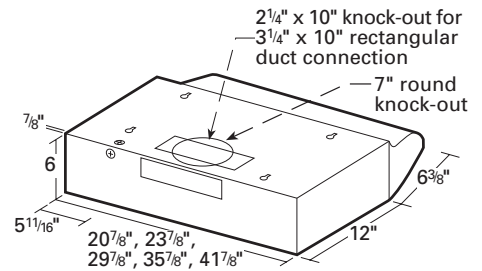

• Filters

UL rated, class 2 filter.
 Grease Filter: RF35 - 8⁷/₈"x10³/₈" (included).
 Charcoal Filter: RF34 (not included).
 Combo Grease/Charcoal: RF55 (not included).

• Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

PERFORMANCE											
Air Flow ^{RPM} CFM	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.05	0.1	0.125	0.15	0.2	0.25	0.3			
Vertical Ducting	203	191	180	167	148	124	101	82	7.5	3000	87
Horizontal Ducting	203	191	180	167	148	124	101	82	7.0	3000	87

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Drive
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 110 Glidden Road
 Brampton, Ontario L6T 2J3
 Tel: (905) 456-2033
 Fax: (905) 456-1015