



Wall Pyramid – Pro Style

The power you need. The quiet you want!



Features

- ◆ **Lighting:** 9.5 Watt Flood LED (50 Watt Halogen/PAR20 Equivalent/Dimmable) or 50 Watt Halogen Flood (PAR20)
- ◆ **Heat Sensor:** Fire Safety Thermostat with Automatic turn ON when temp. reaches 130 degrees.
- ◆ **Filters:** Stainless Steel Baffle. **36" Aluminum Mesh Standard.**
- ◆ **Filters:** **WHP1900PS1 Aluminum Mesh Standard.**
- ◆ **Optional Filters:** Slim Baffles available on 36" or PS1 models. Will reduce CFM by 10%.
- ◆ **Duct Cover:** Included with hood and made to your specifications. See reverse side for stack calculations.
- ◆ **Custom:** Custom sizes available. Call with exact dimensions for pricing and delivery time.
- ◆ **Rails:** Decorative rails available.
- ◆ **Optional Modified Wiring:** Wiring for "remote" switch placement. Includes switches & knobs.



SLIM BAFFLE

Specifications

- ◆ **Power:** Flame Retardant Centrifugal Blowers. 635 to 1425 CFM.
- ◆ **Electrical:** 115 AC, 60 Hz, 9 Amps. Suggested use with 15 Amp circuit.
- ◆ **Stainless Steel:** Complete **Stainless Steel** Construction for Durability and Fire Safety.
- ◆ **Finishes:** Standard: Stainless Steel, White or black powder coat available. **Optional:** RAL color choices available.
- ◆ **Distance Codes:** Check local city, county and cooking appliance specifications. UL tested at 36" above cooking surface.
- ◆ **Installation:** Includes duct cover made to your specifications for easy installation.
- ◆ **Warranty : 7 Year, In-Home—Parts & Labor. (Best in the Industry!)** No "Performance" Warranty when used above BBQ Style Grills/Griddles. Call to discuss.

MODELS	POWER CFM	MOTOR TYPE	CONTROLS	SONES LOW—HI	DEPTH	LIGHTS	DUCT	SIZES
WHP1900PSB	635	Dual Blowers	Variable	1.6 - 4.6	24-1/8"	Front Panel	Single 7"	42" & 48"
WHP1936PS	750	Dual Blowers	Variable	1.6 - 4.6	24-1/8"	Front Panel	Single 7"	36"
WHP1900PSB-8	800	Dual Blowers	Variable	1.6 - 4.6	24-1/8"	Front Panel	Single 8"	36", 42" & 48"
WHP1900PSB-K	925	Dual Blowers	Variable	1.6 - 4.6	24-1/8"	Front Panel	Single 10"	36", 42" & 48"
WHP1900PS1-TWB-8	1320	Twin Blowers	Variable	1.6 - 4.6	24-1/8"	Front Panel	Two 8"	48", 54", & 60"
WHP1900PS1	635	Single Blower	Variable	1.6 - 4.6	24-1/8"	Front Panel	Single 7"	30", 36" & 42"
WHP1900PS1-8	775	Single Blower	Variable	1.6 - 4.6	24-1/8"	Front Panel	Single 8"	30", 36" & 42"

Employee Owned
American Made
Since 1961 

Wall Pyramid Stack Calculations


NOTE

Example: WHP1900PS1-TW-8
 Vent size 8" round by 3-1/2" high.
 Increase CFM by 20% with 8" vent transition.

All other dimensions remain the same.



8" Transition
 8" Round x 3-1/2" high

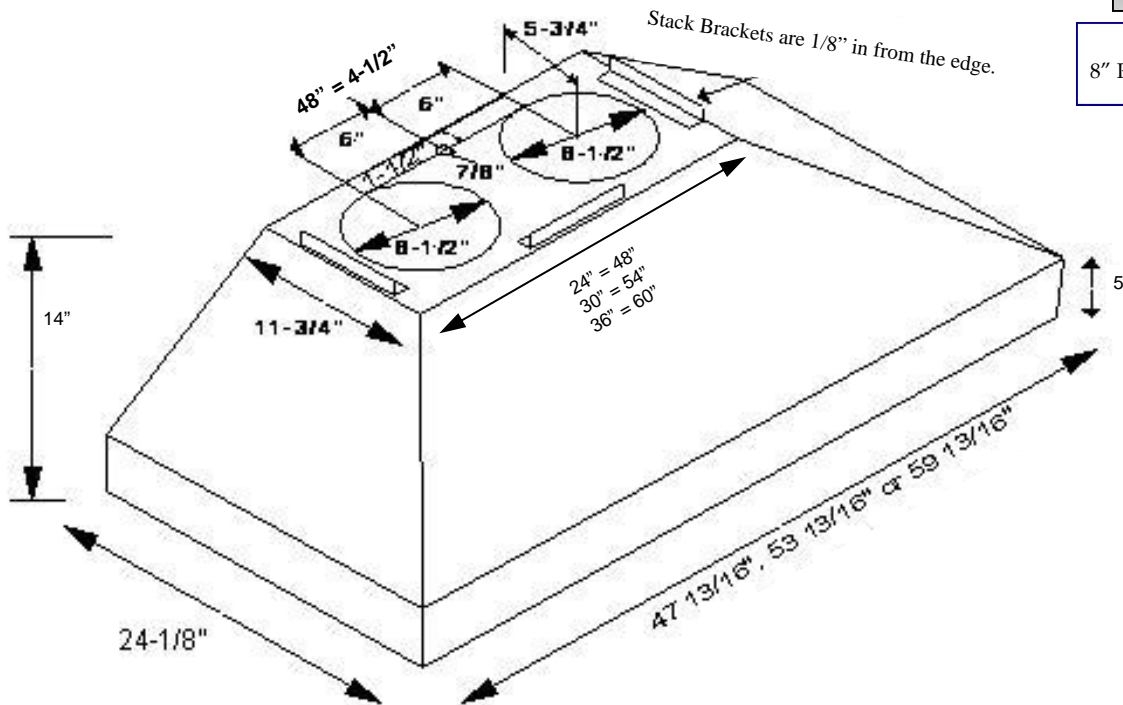

Stack Brackets are 1/8" in from the edge.

24" = 48"
 30" = 54"
 36" = 60"

CEILING HEIGHT = _____

COUNTER HEIGHT = 36"

MOUNTING HEIGHT = 36"

HOOD HEIGHT = 14"

Subtract counter height and mounting height from total ceiling height, then subtract height of hood. This will give you your stack height.

Example for an 8 foot ceiling: 96" minus— 36", minus— 36", minus— 14" = 10" High Stack

WHP1900PS1-TWB

48" = 11-5/8" x 23-3/4" x HEIGHT—MODEL # WHPTW48-STK-FINISH-HEIGHT

54" = 11-5/8" x 29-3/4" x HEIGHT—MODEL # WHPTW54-STK-FINISH-HEIGHT

60" = 11-5/8" x 35-3/4" x HEIGHT—MODEL # WHPTW60-STK-FINISH-HEIGHT

FINISH: BL=BLACK, WH=WHITE, SS=STAINLESS STEEL

EXAMPLE: WHPTW60-STK-BL-18"

Price includes duct cover up to 48". Call for cost on custom sizes over 48"



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/8" and are subject to change. Drawings are not to scale.