




Omega National
P R O D U C T S

Contempora Range Hood

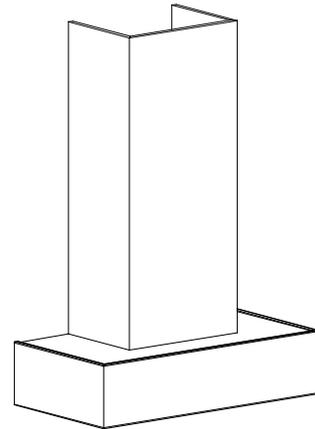


Patent Pending

Important Notes

- Always read the instructions completely and carefully before beginning assembly.
- Remove and check contents for damage and/or missing parts. Keep the original cartons and packing materials, which are required for any authorized adjustment by our dealers.
- These instructions are for reference only. Make sure installation procedures comply with all applicable building codes in your area.


Parts List

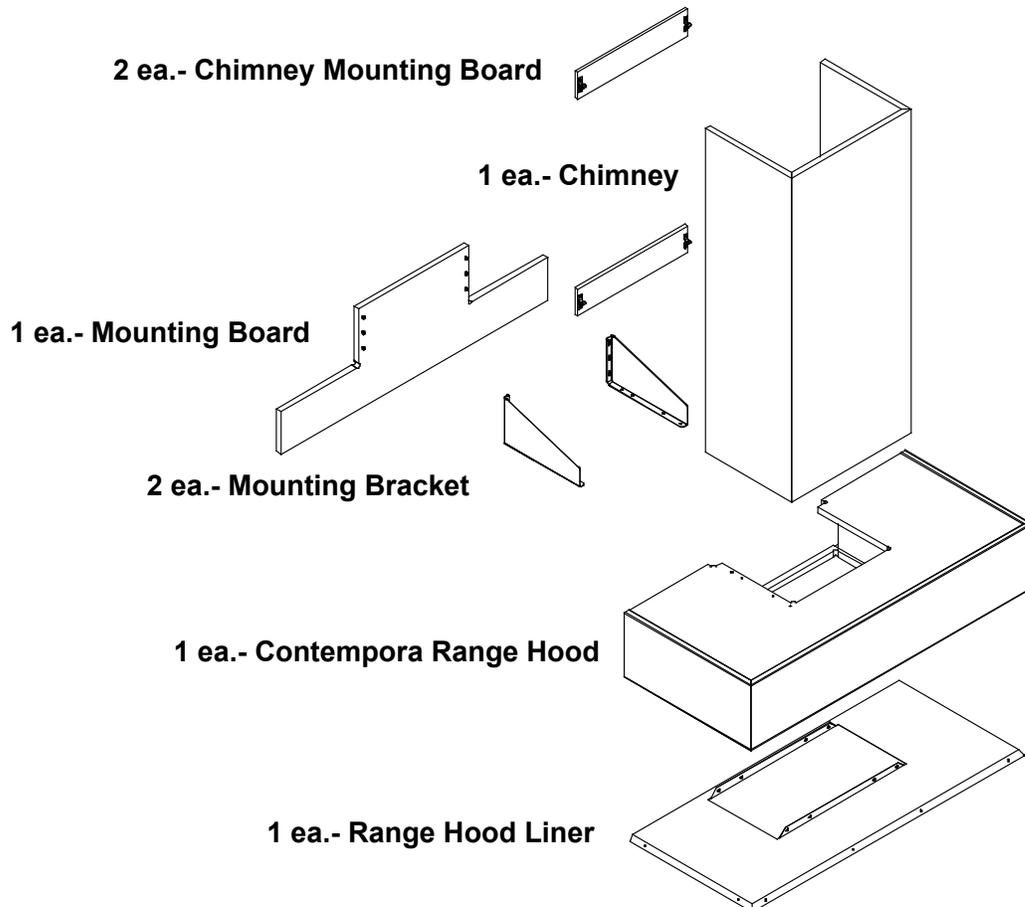


1 ea.- Hardware Pack

Assembly Instructions

Step 1: Install 6 each "T" nuts into the back of the Mounting Board, into the counterbored holes. Hammer them flush to the surface (see figure 1.)

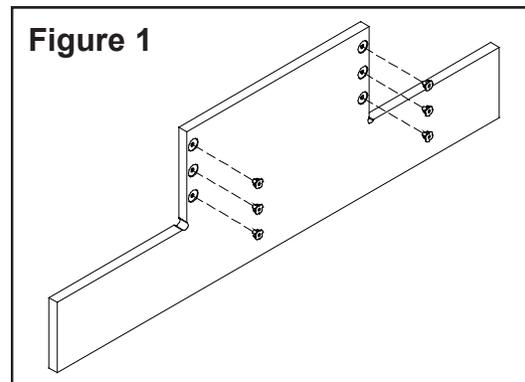


Step 2: Draw a level line on the wall centered where the Range Hood is to go 2 inches above where the bottom of the Range Hood will be (See figure 2). A distance of 24-30 inches from the stove top to the wood hood is recommended. Check local building codes and regulations for final determination.

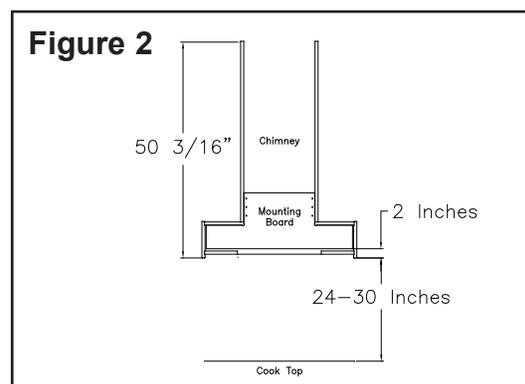


Step 3: Screw the Mounting Board to the wall matching the bottom of the Mounting plate to the line on the wall. Make sure to hit at least two studs and to use at least 6 screws of sufficient size and length for the application (See figure 3).


Warning: Failure to fasten this panel to studs or using the wrong screws may cause a failure of the mounting system and possible injury.

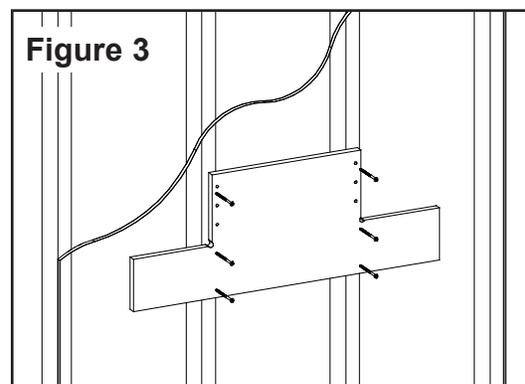


Step 4: Start 6 each 10-24 x 3/4" screws into the "T" nuts that were previously installed (see figure 4.) The large barbed end of the "T" nuts should be on the opposite side of the Mounting Board.

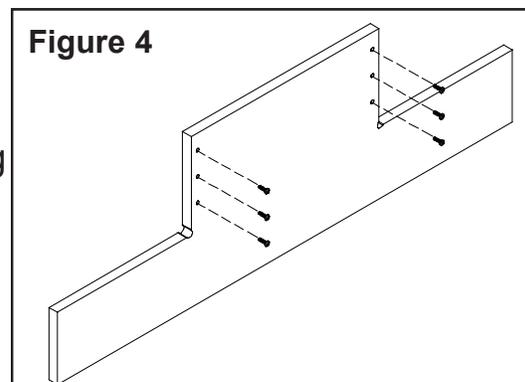


Step 5: If not installed after the Range Hood Was finished, attach the Liner to the Range Hood with #6 x 1/2" Truss Head Screws (See figure 5).

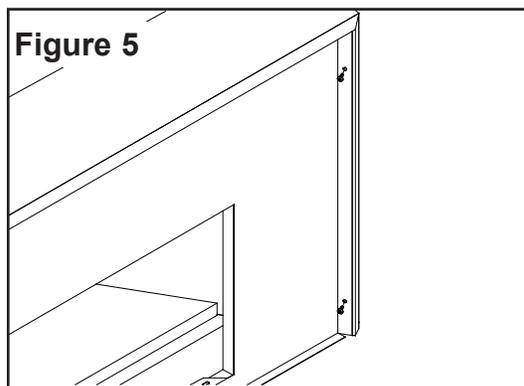


Step 6: Attach the Mounting Brackets to the Contempora Range Hood with 8 each #10 x 3/4" Pan Head screws. The flange of Mounting Bracket should be to the inside (See figure 6).

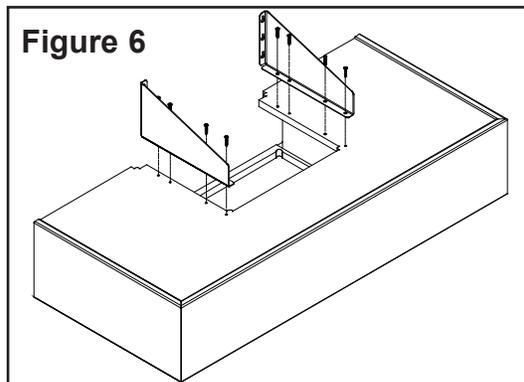

Step 7: Remove the face plate and filters from the Omega National Products Blower (not included) and insert the blower into the liner from the inside. Using the 4 holes in the side of the blower that correspond to the holes in the liner, attach the blower to the liner and rangehood assembly with 4 each #6 x 1/2" screws. (See figure 7).

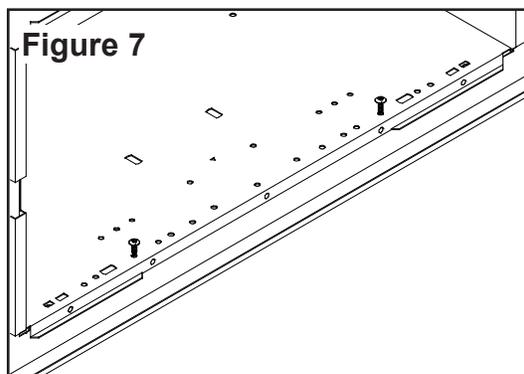


Step 8: Using help if necessary, lift the Range Hood, Blower and mounting bracket assembly into position and hang on the screws extending from the Mounting Board. Make sure the brackets are firmly seated into the key hole slot and then tighten all the screws (See figure 8).

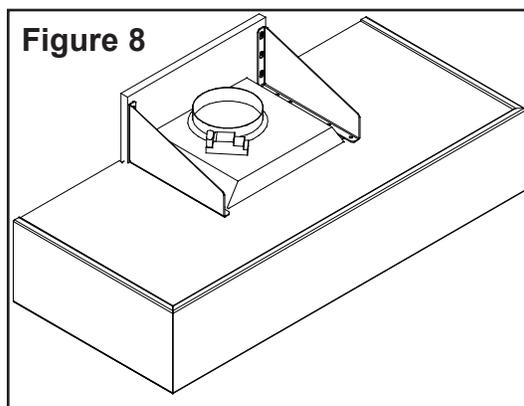



Step 9: Determine the height of the Chimney and cut to length. Cut the top of the chimney only. Reposition the roller catches if necessary.

Step 10: Determine where the Chimney Mounting Blocks should be located and mount securely to the wall (See figure 10).

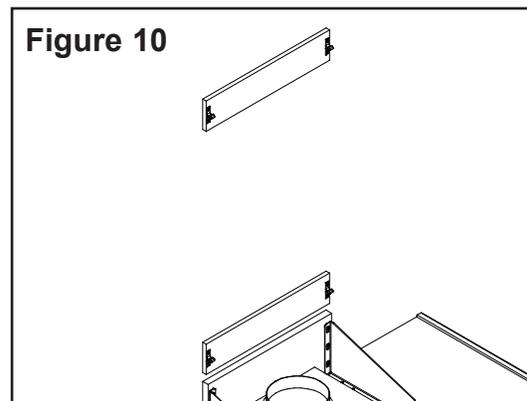

Step 11: Make all ventilation and electrical connections at this time. (These must be done in accordance with all applicable building codes and requirements in your area). Reinstall the blower faceplate and filters.

Step 12: Snap the Chimney to the Chimney Mounting Blocks and trim as necessary.

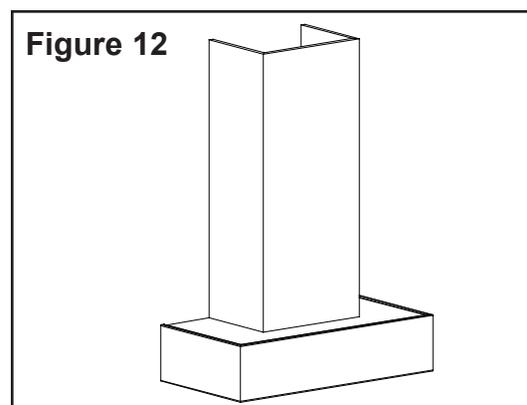

Omega National
P R O D U C T S