



Outlet Anatomy for Blade Series Outlets

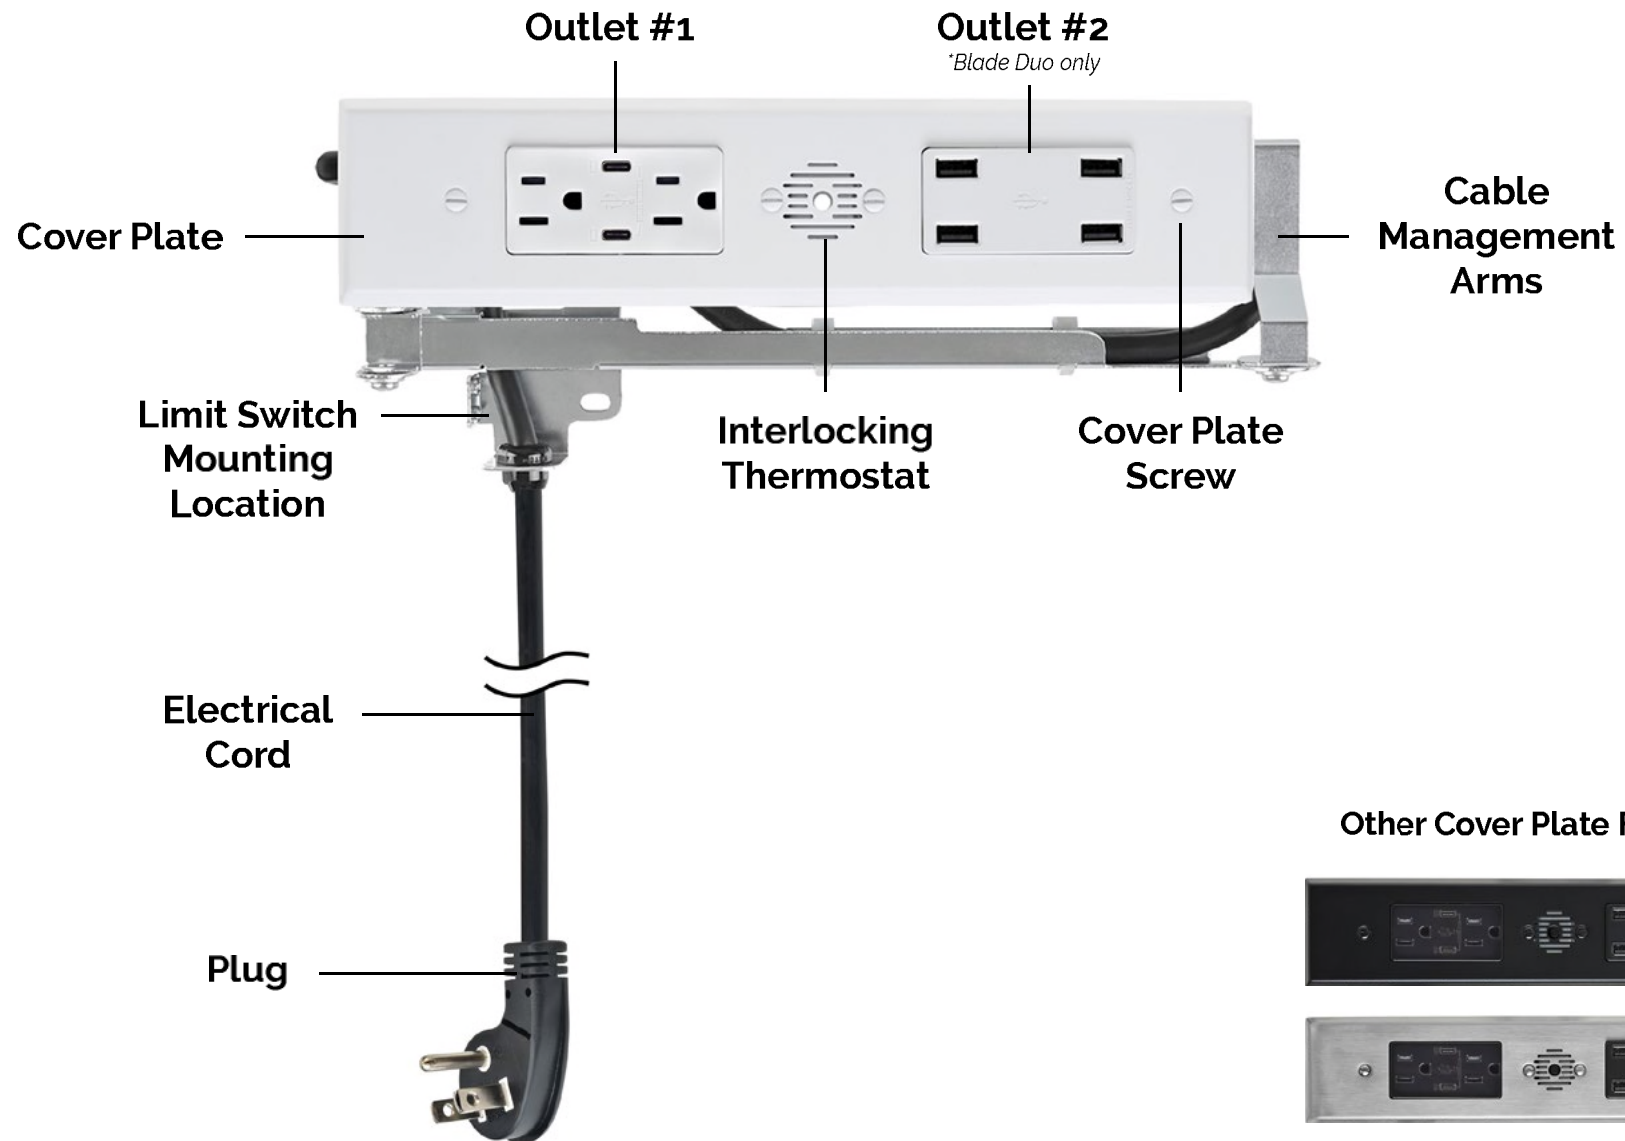


Outlet Dimensions of a Blade Duo In Drawer Outlet

Outlet Width	13" (330mm)
Outlet Height	4.64" (118mm)
Outlet Depth	2.5" (64mm)
Receptacle Box Depth	1.93" (49mm)
Cover Plate Height	2.52" (64mm)
Cover Plate Width	11.26" (286mm)

Front View

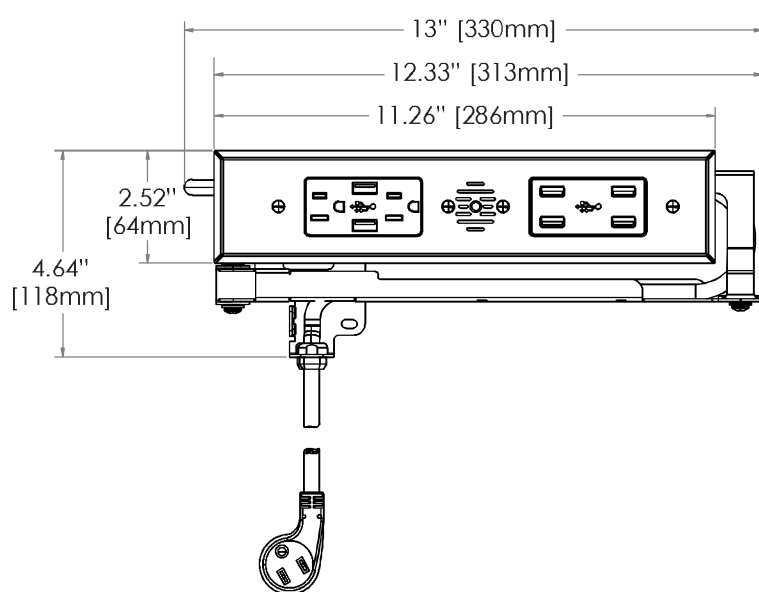


Top View

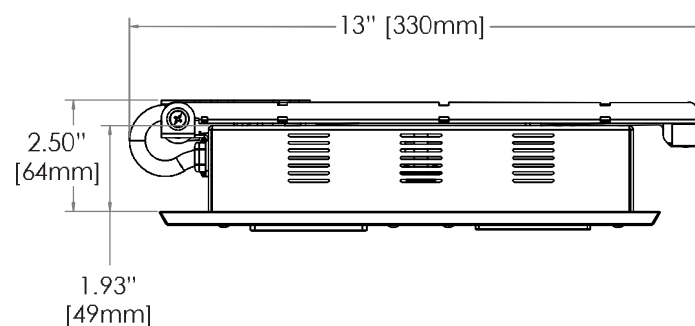


Outlet Dimensions of a Blade In Drawer Outlet

Outlet Width	13" (330mm)
Outlet Height	4.64" (118mm)
Outlet Depth	2.5" (64mm)
Receptacle Box Depth	1.93" (49mm)
Cover Plate Height	2.52" (64mm)
Cover Plate Width	7.18" (182mm)

Front View

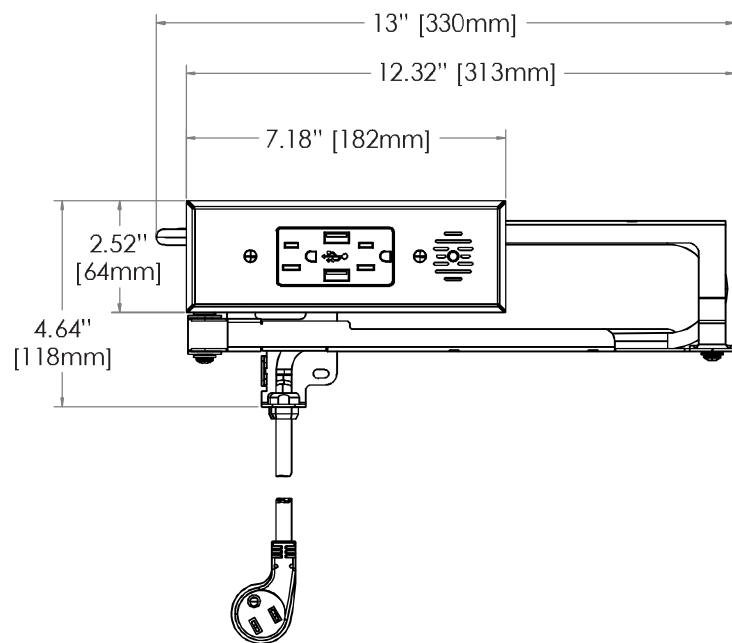

Top View

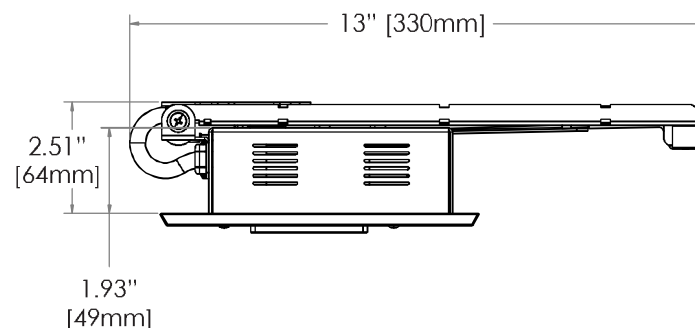


Outlet Orientation

Docking Drawer Blade Series outlets can be positioned in a variety of orientations to fit any cabinet and every project.


Horizontal Mounting

Blade and Blade Duo outlets can be mounted horizontally and facing to the left or right.

Horizontal Left

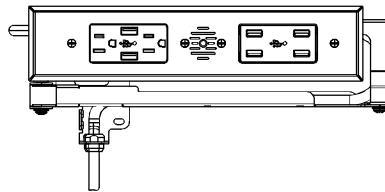

Horizontal Right

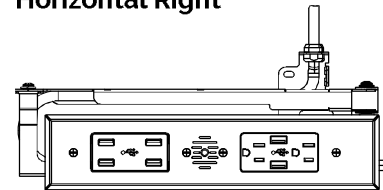


Pro Tip

Blade Series outlets can be rotated 360 degrees, facing left, right, up or down, referring to the cord exit point.
Ex: Horizontal left - the receptacle box is horizontal and the cord exits on the left side of the outlet.


Vertical Mounting

Blade and Blade Duo outlets can be mounted vertically and facing to up or down.

Vertical Up

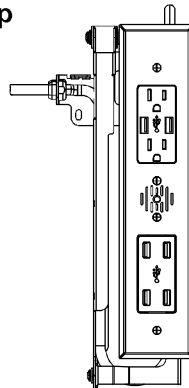

Vertical Down

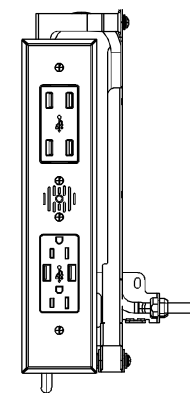

Features of Blade Series Outlets

Electrical Certification	<u>ETL Listed</u> for use in the US and Canada. Outlets 1514-222 & 1514-120 (are certified for use in Canada). All other Blade Series outlets are ETL Listed for use in Canada when installed with an Interlock Box* that de-energizes the outlet when the drawer starts to close <i>*(sold separately)</i>
Interlocking Safety Features	The Interlock Thermostat de-energizes the outlet when the temperature exceeds 120°F (49°C). The Safety Interlock Box* uses a limit switch to de-energize the outlet when the drawer starts to close. <i>*(sold separately)</i>
Electrical Connection	4 1/2' cord with a NEMA 5-15P plug (All 15 amp Blade Series outlets)
Wire Gauge	14 AWG wire cable (All 15 amp Blade Series outlets)
Cable Protection	Ultra flexible cable jacket and cable strain reliefs prevent tension and wear
Outlet Features	Leviton outlets featuring a variety of configurations including AC, USB-A and USB-C and can connect between 2-8 devices. All AC outlets are tamper resistant.
Product Testing	Assemblies are cycle tested over 500,000 times to ensure a long life of safe operation
Cover Plate Finishes	White, Black and Stainless Steel
Warranty	2 Years
Country of Origin	Made in Mexico
Service	If needed, the outlet can be easily separated from the drawer box for maintenance or service