

Featuring timeless design that has become an icon of European style, this chimney hood offers bright LED lighting that illuminates the cooktop.

| SIZE        | MODEL NO. | GREASE FILTERS (replacement) | NON-DUCTED CHARCOAL FILTERS |
|-------------|-----------|------------------------------|-----------------------------|
| 29-1/2-in.  | BW5030SSL | S97018027 (set of 2)         | ROUNDFILTER                 |
| 35-7/16-in. | BW5036SSL | S97018028 (set of 3)         | ROUNDFILTER                 |

| HVI PERFORMANCE  |       |          |        |         |      |        |         |                    |                   |
|------------------|-------|----------|--------|---------|------|--------|---------|--------------------|-------------------|
| Duct Orientation | Size  | Damper   | Sones  |         |      | CFM    |         |                    |                   |
|                  |       |          | Normal | Medium* | High | Normal | Medium* | High 0.25 in. w.g. | High 0.1 in. w.g. |
| Round - Vertical | 6 in. | Included | 1.5    | 3.5     | 8.0  | 130    | 220     | 330                | 350               |

| FEATURES                            |                                                                                                                                                                                                 |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. Blower Airflow                 | 380 CFM*                                                                                                                                                                                        |
| Finish                              | 430 Stainless Steel no. 4 Brushed                                                                                                                                                               |
| Wall Mount                          | Yes                                                                                                                                                                                             |
| Telescopic Flue                     | Yes - Accomodates 8-ft. to 9-ft. ceilings                                                                                                                                                       |
| Convertible to non-ducted operation | Yes - Non-Duct Kit RK58 sold separately                                                                                                                                                         |
| Blower type                         | Single, Centrifugal                                                                                                                                                                             |
| Cord-connected                      | Yes                                                                                                                                                                                             |
| Control type                        | 5-Pushbuttons <ul style="list-style-type: none"> <li>• Blower on-off</li> <li>• Blower low speed</li> <li>• Blower medium speed</li> <li>• Blower high speed</li> <li>• Light on-off</li> </ul> |
| Lighting                            | 2 x LED Modules 5.5 W, (included)                                                                                                                                                               |
| Grease Filters                      | Dishwasher-safe with quick-release latch                                                                                                                                                        |

**AC INPUT**  
120V, 60 Hz - 2.6 AMPS

**OPTIONAL ACCESSORIES (sold separately)**

|                                   |         |
|-----------------------------------|---------|
| Flue Extension for 10-ft. ceiling | FXN58SS |
| Non-Duct Kit                      | RK58    |



**MINIMUM MOUNTING HEIGHT**

30-in. from cooktop to bottom of hood

**LIMITED WARRANTY**

1-year

**FOR INDOOR USE ONLY**

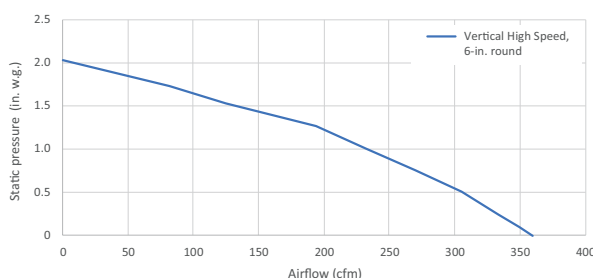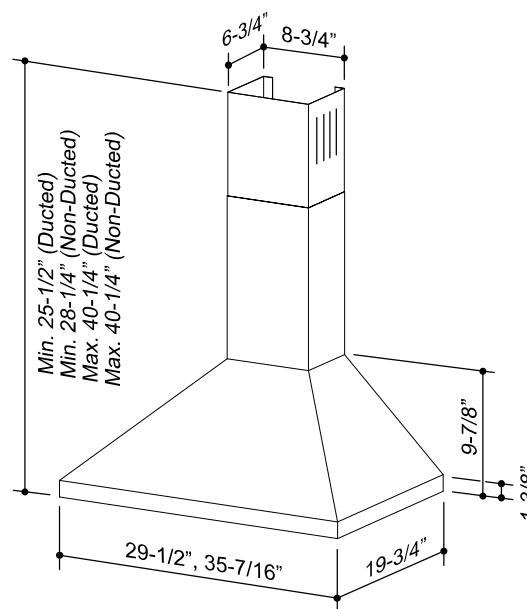

SPECIFICATION SHEET  
**BW50 SERIES**



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements. \* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.